


FDM 2 - FO	Chapter 9	Date: 22. Aug. 2019-v06	Fr/Am
------------	-----------	-------------------------	-------



Product-Data Sheet

FDM 2 - FO

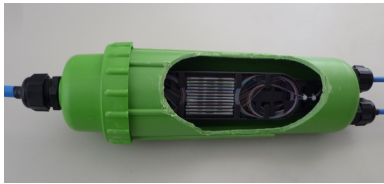

Fiber optic closure, 4 x 12 crimp or shrink, Connect or Branch

Material			Application:
Polypropylen			Casing, 2 fiberoptic carrier
Spliceholder, 4x12 shrink or crimp			Splicetray, mounted
Thermoplast. Elastomer			Rubber
Gland: 2x M20 and 1x M25 2 sealing plugs 1x M20, 1x M25			Case PA, IP 68
Cable:	Diameter	Bolting force	3 cable entries
M20	7-13 mm	5,0 Nm	
M25	11-17 mm (ca.)	8,5 Nm	
Pull reliefs			4
Temperature range			-30° / +80° C
Durability test			no leak 0,6 bar steel bullet 1 kg/1 m
Maximal length fibre:			180 mm
Bending – fibre			36 mm
Complete length closure:			360 mm
Diameter closure			101 mm
Expertise-Degree of protection:	VA EE 35298B		
Registration:	IP 68, EN 60529, ISO 9001, CE		
Packaging Unit:			6 pcs./Carton
Usage:	usually in the ground		colour-resistant
	Special order:		UV-durable (black) wall mount available